


4439

Enclosed addressable manual call point with isolator

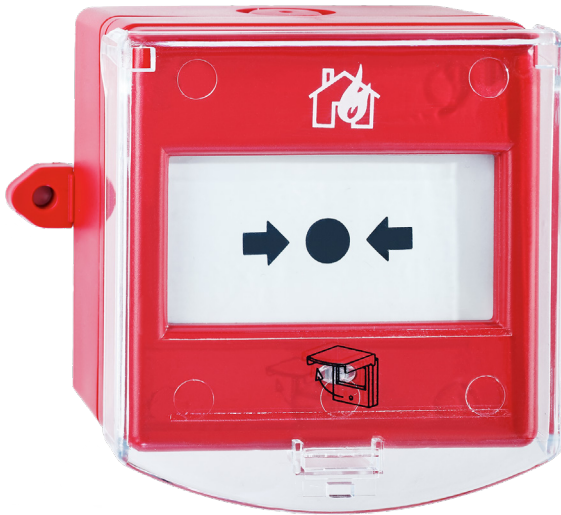

Features

- › IP 66 for use outdoor or in humid areas.
- › Polycarbonate flap to protect against accidental operation
- › Built-in short-circuit isolator
- › Configurable polling LED on the front

General

- › Tested and approved according to EN54-11 and EN54-17
- › VdS approval: G213005
- › CPR: 0786-CPR-21236

Order number

- › 4439 - Enclosed addressable manual call point with isolator

Related products

- › 2347 - Replacement glass (10 pcs)
- › 2348 - Replacement polycarbonate flap (10 pcs)



237 g



87 x 87 x 66 mm



IP66



-25 TO +70 °C



<90%

